

HSF



ROHS

SPECIFICATION

Current Rating:	1.5Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T,UL 94V-0 Black

Ordering Code:

FHDS01 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
01 To 40

③ Contact Plating:

G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin

④ Connector Type
S:Single

⑤ Plastic High:

H1:H4.0

H2:H4.6

H3:H2.0

Please mark the desired length in the H

⑥ Insulator Material

B:PA6T

C:LCP

D:PA46

E:PA9T

⑦ Packing

A:Tray




B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

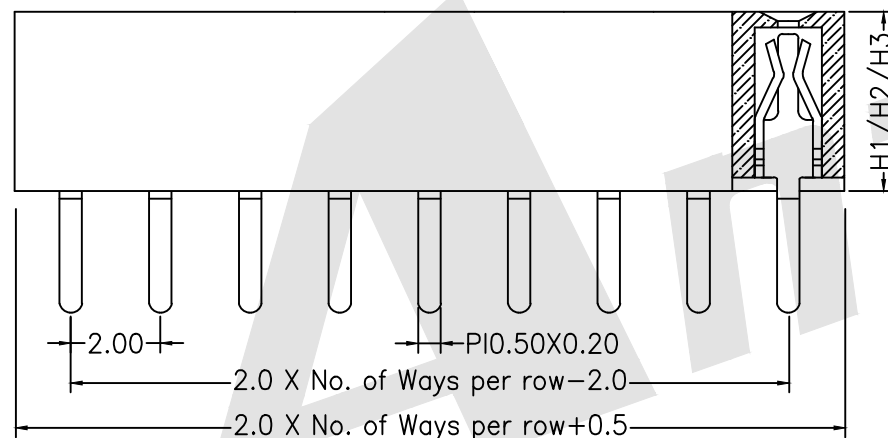

PCB LAYOUT

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW YG ZHONG DATE 01/05/2016
CHECK BobYang DATE 01/05/2016



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO.,LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: 2.00mm Female Header
Single Row Straight Type

DRAWING NO: FHDS01-XXSXXX

PRODUCT NO: FHDS01-XXSXXX

REV

DESCRIPTION

DATE